

TriaxPower—Medium-size Battery

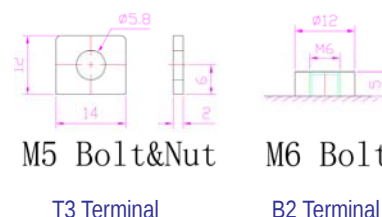


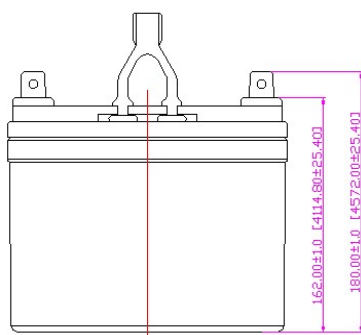
- High performance, completely maintenance-free, low self-discharge
- 100% precise quality testing, stable quality and high reliable performance
- Unique grid alloy formula and updated manufacturing technique
- Floating & standby use: up to 8 years
- Cycle use 1: Up to 260 cycles at 100% DOD
- Cycle use 2: Up to 500 cycles at 50% DOD

Application:

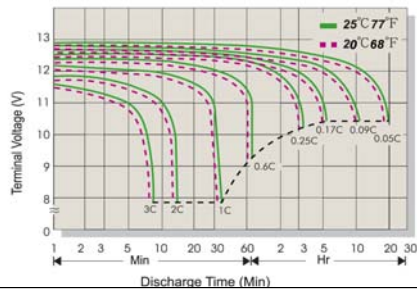
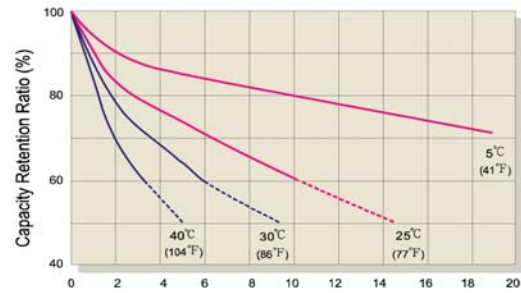
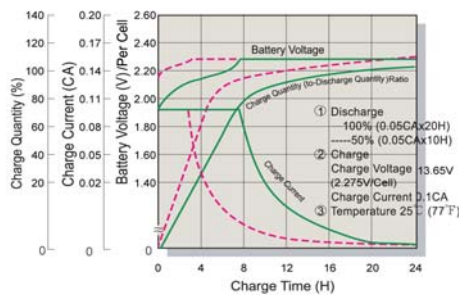
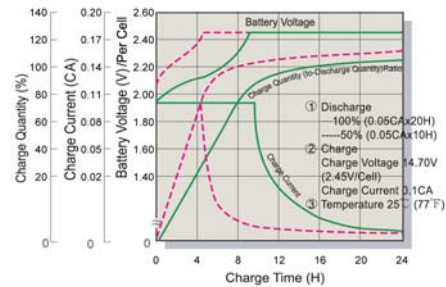
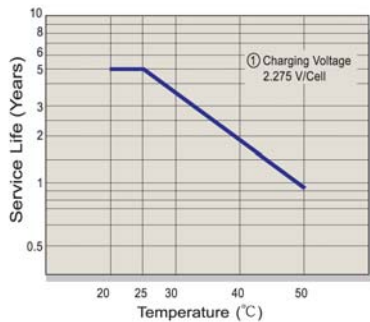
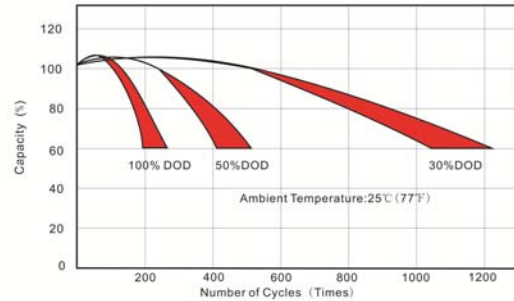
- Telecommunications
- Alarm and security system
- Uninterruptable Power Supply (UPS)
- Communication power supply
- Electric Power System (EPS)
- DC power supply
- Emergency backup power supply
- Auto control system

Construction:

- ComponentRaw material
- SealantEpoxy
- PositiveLead dioxide
- Safety valve Rubber
- NegativeLead
- TerminalCopper/Pb
- ContainerABS
- SeparatorFiber glass
- CoverABS
- Electrolyte Sulfuric acid


Speification:

Battery Model	BAKU1233 12V33AH			
Designed Floating Life	Up to 5 Years			
Capacity (25℃)	20HR(1.66A,10.5V)	10HR(3.30A,10.5V)	5HR(5.38A,10.5V)	1HR(18.2A,10.5V)
	33.20AH	33.00AH	26.90AH	18.20AH
Dimensions	Length	Width	Height	Total Height
	196mm (7.72inch)	131mm (5.16inch)	161mm (6.34inch)	180mm (7.09inch)
Approx. Weight	10.80Kg (23.81 lbs)±5%			
Internal Resistance	Full charged at 25℃: ≤16.0mΩ			
Self Discharge	2% of capacity declined per month at (25℃)			
Capacity Affected by Temp.(20HR)	40℃	25℃	0℃	-15℃
	102%	100%	85%	65%
Charge Voltage(25℃)	Cycle use		Float use	
	14.40-15.00V(-30mV/℃), max. Current:9.90A		13.50-13.80V (-20mV/℃)	

Terminal Voltage (V) and Discharge Time

Capacity Retention Characteristic

Battery Voltage and Charge Time for Standby Use

Battery Voltage and Charge Time for Cycle Use

Tickle(or Float) Service Life

Cycle Service Life

Constant Current Discharge(CC,Unit:A) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	73.8	54.3	47.2	28.5	16.8	9.9	7.4	6.21	5.11	4.70	3.13	1.61
1.80V/Cell	76.6	56.4	49.0	29.5	17.5	10.3	7.7	6.46	5.32	4.90	3.27	1.63
1.75V/Cell	84.3	59.2	51.4	30.7	18.2	10.6	7.9	6.53	5.38	4.95	3.30	1.66
1.70V/Cell	94.2	62.1	53.9	32.2	18.5	10.8	8.1	6.59	5.43	5.00	3.33	1.71
1.67V/Cell	104.2	64.9	56.3	33.1	19.2	11.1	8.3	6.66	5.48	5.04	3.36	1.73

Constant Power Discharge (CP,Unit:W) at 25°C(77°F)

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	140.2	103.3	89.6	54.1	31.9	18.8	14.0	11.79	9.71	8.93	5.96	3.06
1.80V/Cell	145.5	107.2	93.1	56.1	33.2	19.5	14.6	12.28	10.11	9.31	6.20	3.19
1.75V/Cell	160.1	112.6	97.7	58.4	34.5	20.1	15.0	12.41	10.21	9.40	6.27	3.23
1.70V/Cell	179.0	117.9	102.4	61.2	35.2	20.5	15.3	12.53	10.31	9.49	6.33	3.26
1.67V/Cell	197.9	123.3	107.0	62.9	36.5	21.1	15.7	12.65	10.42	9.58	6.39	3.29